


The Xyron Pro1255 Dual Purpose A3/A4 Machine

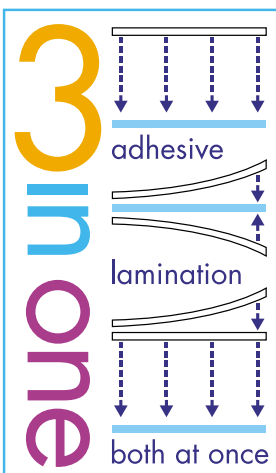

The Fastest Growing Cold Lamination and Adhesive Application System in the World.

- Clean, simple, easy to use
- For client presentation, mock-ups and POP material
- Range of adhesives - Re-positional or permanent
- Lamination top, adhesive back - Re-positional or permanent

The Xyron Pro1255

Whether applying adhesive in the studio for client presentation, mock-ups, story - boards or point of purchase material, the Xyron Pro1255 instantly applies adhesive without heat or electricity. Simply feed an item in, turn the handle and trim. No smell, no mess and no waiting. The patented drop-in cartridge system allows users to quickly switch between applications, making the Xyron Pro1255 one of the most versatile machines available. Its improved adhesive formula, coupled with higher-pressure rollers, improves both transfer and bonding quality.



Product Descriptions

AT1256-100 Re-positional Mounting Adhesive: Allows you to re-position your item over and over again. It will allow easy removal from mount-boards, paper, walls and most other surfaces.*

AT1251-100 Standard Mounting Adhesive: A strong adhesive that creates a permanent bond on most surfaces.


AT1255-100 High Tack Mounting Adhesive: A powerful adhesive that instantly creates a permanent bond on most surfaces.

AT1254-100 Quick Tack Mounting Adhesive: A tough adhesive that creates a permanent bond on most surfaces. Good for use with colour laser printers.

LAT1251-100 Combination One Side Lamination/One Side Permanent Adhesive: Xyron's general use laminate on the top surface and a permanent adhesive on the reverse.

LAT1256-100 Combination One Side Lamination/One Side Re-positional Adhesive: Xyron's general use laminate on the top surface and a re-positional adhesive on the reverse.*

Key



Specifications

Footprint: 33 cm L x 38.1 cm x W 2 cm H

Document Width (Max): 29.8 cm

Weight: Approximately 7 kg

Document Length (Max): 30.5 m

Packaged Weight: Approx 9 kg

Power Source: None

Document Thickness (Max): 3.2 mm

Cutter: Removable, replaceable cutter

1255 CARTRIDGES

| Supplies (Part Number) | Product Description | Material Length | Material Width | Laminate & Adhesive Combination thickness (Per Side) | Mounting Adhesive Thickness | Adhesive pH | Mounting Adhesive Strength (1:10; 10 High) | PAT Approved |
|--|---|-----------------|----------------|--|-----------------------------|-------------------------------|--|--------------|
| Adhesive Application Cartridges (AT Series): | | | | | | | | |
| AT 1251-100 | Adhesive Application - Permanent High Tack | 30.5 m | 29.8 cm | N/A | 15.2 mic | 5.0 - 7.0 | 10 | Yes |
| AT 1254-100 | Adhesive Application - Permanent Quick Tack | 30.5 m | 29.8 cm | N/A | 15.2 mic | 5.0 - 7.0 | 9 | Yes |
| AT 1255-100 | Adhesive Application - Standard | 30.5 m | 29.8 cm | N/A | 15.2 mic | 5.0 - 7.0 | 8 | Yes |
| AT 1256-100 | Adhesive Application - Re-positional | 30.5 m | 29.8 cm | N/A | 27.9 mic | Acid Free | ~ | Yes |
| Combination One Side Lamination/One Side Adhesive Application (LAT Series): | | | | | | | | |
| LAT 1251-100 | 1 Side Laminate/1 Side Adhesive Application General Use Laminate/High Tack Adhesive | 30.5 m | 29.8 cm | 62.5 mic | 15.2 mic | Lam: 6.0 - 6.4 Adh: 5.0 - 7.0 | 10 | Yes |
| LAT 1256-100 | 1 Side Laminate/1 Side Adhesive Application General Use Laminate/Re-positional | 30.5 m | 29.8 cm | 62.5 mic | 27.9 mic | Lam 6.0 - 6.4 Adh: Acid Free | ~ | Yes |

* Please test before each application.